

SINGLE COLUMN CHAIN AUTOMATION FOR **DELIMITATION OF PRIVATE PROPERTIES**



CAT50 single column automation allows you to restrict access to your private property, The automation consists of a single column that contains the chain collecting mechanism inside

> The chain can be raised and lowered by pressing simply a button on the remote control.



CAT50

Technical specifications

CODE CAT/50

ELECTRICAL DATA

POWER SUPPLY 230V 50Hz

MOTOR VOLTAGE 24V CC

CURRENT (A) 4

POWER (W) 90

PERFORMANCE DATA
OPENING TIME (SECONDS)

MAX CHAIN LENGHT (METERS)

10

DIMENSIONAL AND GENERAL DATA


 DIMENSIONS (MM)
 175x208x1000

 OPERATING TEMP (°C MIN/MAX)
 -20 +50 °C

 WEIGHT (KG)
 28

Installationa reference

- [1] Chain barrier CAT50
- [2] Wall or column on opposite site
- [3] Chain
- [4] Counterweight
- [5] Fuse
- [6] Chain collector
- [7] Radiotransmitter

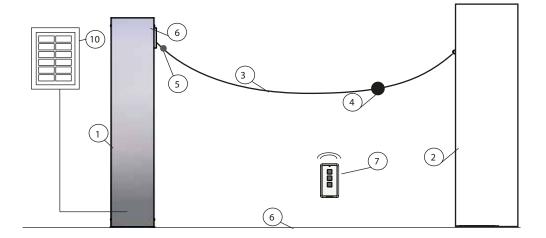

DIMENSIONS 175 208

ACCESSORIES



CAT/103 galvanized steel chain



CAT/102/light undergroungd galvanized chain collector



CAT/103/inox stainless steel chain



CAT/102 underground chain collector with cataphoresis treatment



CAT/103/red galvanized and painted chain



SOLAR/24 solar charger



CAT/102/heavy out-of-floor walk-on chain collector made in high-thickness galvanized steel



CAT/106 safety chain joint



